



# MINIMAX

MOBILE SERVICES

## FROST-PROOF FOAM-FIRE EXTINGUISHERS

WS 6 sfG and WS 9 sfG

### PRODUCT

- ▶ Foam fire extinguishers are ideal to fight initial fires of fire classes A and B.
- ▶ In the case of class A fires, the extinguishing effect is based on a combination of cooling effect and barrier effect. The water lowers the temperature to below the ignition point and, as it vaporises, a molten layer is formed, which makes re-ignition impossible. The high wetting effect allows the extinguishing agent to penetrate the burning material.
- ▶ In the case of class B fires, a sliding film and a layer of foam block the supply of oxygen; re-ignition and the rise of combustible vapours are prevented.

### APPLICATION


- ▶ Foam fire extinguishers are used wherever fires involving solid, organic substances or liquid or liquifiable solids need to be extinguished.
- ▶ Foam fire extinguishers are an ideal extinguishing solution if sliding, covering and extremely stable extinguishing agent is required.
- ▶ Typical areas of application are:
  - administrative and industrial areas
  - offices and private practices
  - sales floors
  - public spaces
  - airports
  - nearly all areas for private use

### YOUR ADVANTAGES

- ▶ Readable microchip with NFC technology in the fitting for clear identification of the fire extinguishers as well as automated documentation
- ▶ The extinguishing agent for frost-endangered areas
- ▶ Optimal extinguishing jet and excellent extinguishing power thanks to a special extinguisher nozzle
- ▶ Lever made of impact-proof high performance polymers, high corrosion resistance and sturdiness
- ▶ Carrying handle and operating lever made from shock-resistant high-performance plastic
- ▶ Easy handling due to standardised operation and immediately recognisable functions
- ▶ High extinguishing efficiency due to combination of several extinguishing effects
- ▶ Foam-water mix with particularly efficient additives
- ▶ No re-ignition in case of liquid fires
- ▶ Very little, easy to remove extinguishing residues
- ▶ Easy flow control with adjustable solution nozzle
- ▶ Plastic-coated CO<sub>2</sub> propellant bottle with stainless steel connecting piece
- ▶ Extinguishing agent container made from high quality steel: protected against corrosion by a robust polyester resin outer coating
- ▶ Standard stand pins
- ▶ Maintenance-friendly



## FUNCTION

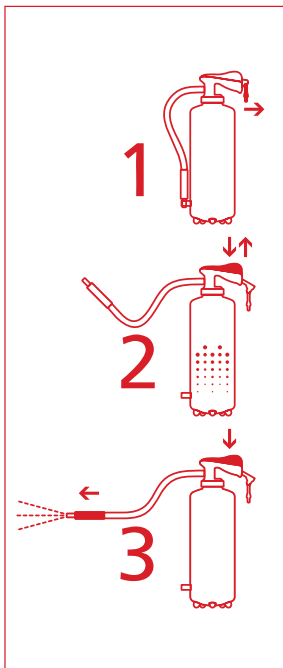

### Pull locking pin

- ▶ In the event of a fire, remove the fire extinguisher from its support and briskly pull the yellow locking pin on the handle backwards.

### Press lever, then release

- ▶ Hold the hose, press the discharge lever all the way down and release again. The fire extinguisher builds pressure through the internal CO<sub>2</sub> gas canister and can be used immediately.

### Press lever to extinguish

- ▶ Aim the extinguishing nozzle towards the fire and press the discharge lever again. Commence extinguishing in a targeted manner.

- ▶ In order to avoid operating errors, all fire extinguishers should be premises with the same operating controls. Minimax offers easy-to-use extinguishers with uniform single-lever operation for all areas of application and fire classification, thus guaranteeing high levels of safety.
- ▶ After pulling out the lock, the extinguisher is ready to operate. When the pressure lever is operated, a blade penetrates the sealing film on the propellant container and opens it. The propellant gas flows into the extinguishant cylinder, presses the extinguishant through the riser and extinguishing hose and, while admixing air, pushes it out of the extinguisher nozzle.
- ▶ The extinguishant flow is interrupted when releasing the pressure lever. Repeated operation of the pressure lever brings fires of solid substances under control. Put liquid fires out in one go!



- Single-lever feature
- Carry handle
- Device protection
- Spindle
- Extinguishing solution
- Riser
- Thermoset inner layer
- Plastic-coated CO<sub>2</sub> propellant bottle with stainless steel connecting piece
- Extinguishing solution tank
- High-strength screen printed inscription
- Extinguishing hose
- Handle
- Extinguisher nozzle
- Standard stand pins

## MAINTENANCE

- ▶ Portable fire extinguishers must be maintained regularly by competent persons. The intervals for maintenance of portable fire extinguishers should be done in accordance with the national regulations. The competent person has also to comply the maintenance instructions of the manufacturer.
- ▶ After use — even after only partial emptying — extinguishers must be refilled immediately in order to reinstate operational readiness.
- ▶ Ask your local agent for all test and filling services.
- ▶ Suitable for up to 1,000 Volt at a minimum distance of 1 m.

Approval

# EN 3

## TECHNICAL DATA

Type	Approval no.	Design	Extinguishing agent quantity	Extinguishing agent	Propellant gas	Test pressure	Max. operating pressure (max. PS) at +60 °C	Duration	Discharge range	Temperature function range	Performance classes*	Dimensions			Weight without holder
												Height	Width	Ø	
WS 6sfG	SP 173/16	S6H-0	6	frost-proof AB-Premix	Kohlendioxid	33	23	48	6	-30 to +60	21 A 144B	550	312	160	11,0
WS 9sfG	SP 174/16	S9H-0	9	frost-proof AB-Premix	Kohlendioxid	33	23	74	6	-30 to +60	27 A 183B	550	320	190	15,0

\* in acc with EN 3. \*\* in acc with ASR A2.2.

Subject to technical modifications

Minimax Mobile Services GmbH & Co. KG  
 Export Department  
 Minimaxstraße 1  
 D-72574 Bad Urach  
 Tel.: +49 (0)7125 154-216  
 Fax: +49 (0)7125 154-166  
 E-Mail: exportmobile@minimax.de  
 www.minimax-mobile.com

